

Vertailu Beam S12000 hydro v. Bucher XPowa V120t road

Polttoaineen kulutus / puhallin k/min VolvoJCB vs VolvoHydro



Bucher Xpowa V120T road

Yläkone JCB 175 hv / k/min	1200	1300	1400	1500	1600	1700	1800
Puhallin k/min (High Capacity Fan)	2291	2482	2673	2864	3055	3246	3437
Ilmamäärä m3/min	228	245	267	279	300	317	343
Alipaine / mm	660	740	840	910	1040	1200	1250
Polttoaineen kulutus JCB / l	6,8	9,6	10,4	11	13	14	17

Alustakone Volvo 460 hv / k/min	600	700	700	700	800	900	1000
Painepesu 200 bar / 106 l	115	120	150	200	200	200	200
Alustan kulutus / l	8	9	10	13	13	10	14
Kokonaiskulutus / l ylä- ja alakone	14,8	18,6	20,4	24	26	24	31

VolvoBeamS12000 hydro

Hydro Volvo FM500							
Alustan k / min	1400	1400	1400	1400	1400	1400	1400
Puhallin k / min (High Capacity Fan)	2200	2400	2500	2800	3000	3200	3400
Ilmamäärä m3 / min	207	228	245	279	300	317	343
Alipaine / mm	610	660	740	910	1040	1200	1250
Painepesu 200 bar / 106 l	190	190	190	190	190	190	190
Kokonaiskulutus / l	29	30	31	34	37	38	40

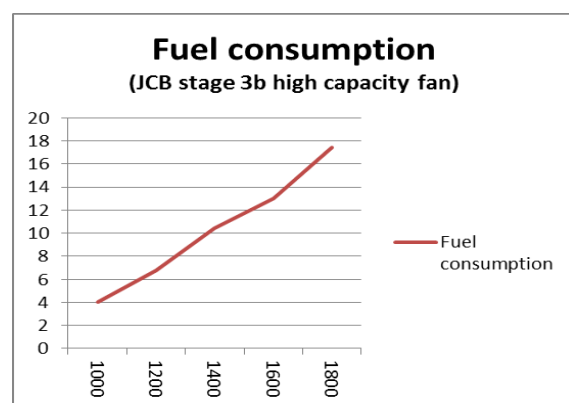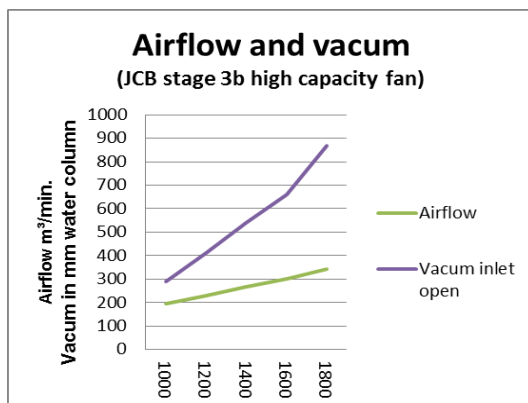

BucherBeam

Oy J-Trading Ab